


Installing New Wax Filter

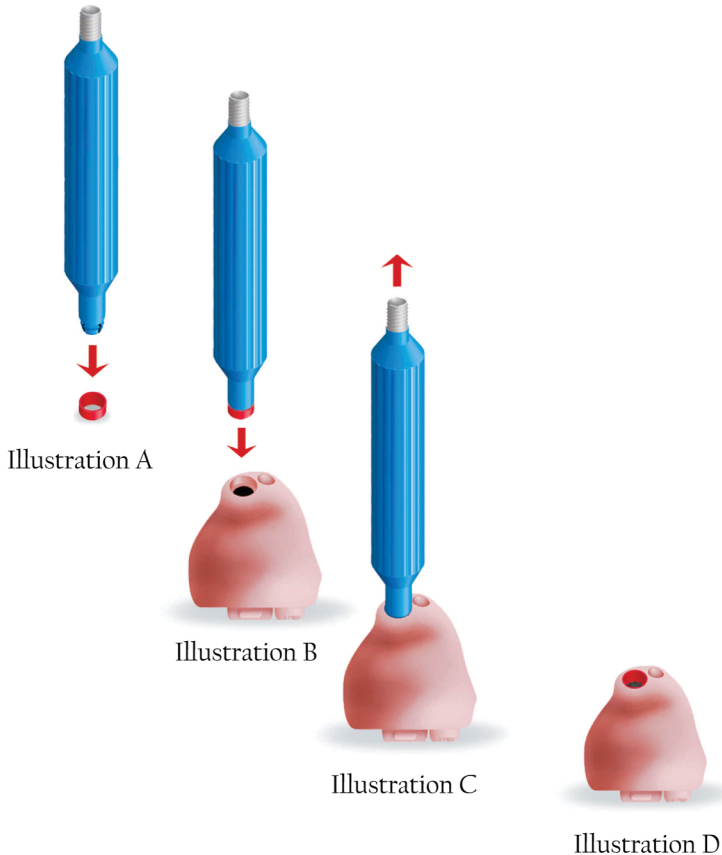

Step 1: Remove filter from the dial-pack using the blue tip of the insertion tool that is provided. (see illustration A)

Step 2: Insert the filter into the hearing aid as shown in illustration B.

Step 3: Pull the insertion tool away from the hearing instrument, leaving the filter in place. (see illustration C)

Step 4: Filter should be flush with the canal tip as shown in illustration D.

Note: Replace the wax filter when the hearing instrument appears to be dead or weak.